


## Airug™ Mat Roll

FLM198 Not for Chemical Contact, Not for Oil/Grease Contact, 3' x 0.375"

Economical, ribbed floor mat with 3/8" thick closed-cell PVC sponge construction provides basic anti-fatigue comfort in dry areas.

- 3/8" thick closed-cell PVC sponge relieves leg and back discomfort
- Ribbed top surface and beveled edges reduce tripping hazards and resist moisture
- Available in black or gray
- Good anti-fatigue mat for dry areas, inexpensive enough to equip multiple workstations
- Custom length lets your mat match your workplace with clean, factory-cut edges

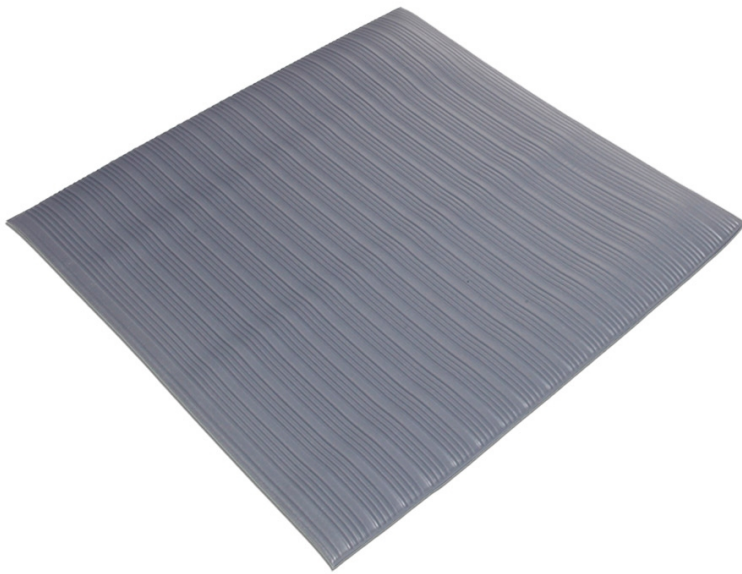

Item#	Description	Dimensions	Weight
FLM198		3' W x 0.375" H	1.35 lbs.
FLM198-GY-SM	Gray,	3' W x 0.375" H	1.35 lbs.
FLM198-BK-SM	Black,	3' W x 0.375" H	1.35 lbs.

### Metric Equivalent:

Item#	Description	Dimensions	Weight
FLM198		91.4cm W x 9.5mm H	.6 kg
FLM198-GY-SM	Gray,	91.4cm W x 9.5mm H	.6 kg
FLM198-BK-SM	Black,	91.4cm W x 9.5mm H	.6 kg

### Specifications

<b>Static-Dissipative</b>	No
<b>Drainage Holes</b>	Without Holes
<b>Anti-Slip</b>	Yes
<b>Dimensions</b>	3' W x 0.375" H
<b>Chemical Contact</b>	Not for Chemical Contact
<b>Oil/Grease Contact</b>	Not for Oil/Grease Contact
<b>Maximum Order Length</b>	60
<b>Minimum Order Length</b>	2

<b>Beveled Edge</b>	Yes
<b>Brand</b>	No Trax
<b>Grit Surface</b>	No
<b>Safe for Welding Areas</b>	No
<b>Sold as</b>	1 foot
<b>Weight</b>	1.35 lbs.
<b>Composition</b>	Closed-Cell PVC Sponge
<b>Application</b>	Dry Applications
<b>UNSPSC</b>	52101510
<b>Pigalog® Page Number</b>	<u>Page 231</u>

## Metric Equivalent

<b>Dimensions</b>	91.4cm W x 9.5mm H
<b>Weight</b>	.6 kg

## Technical Information

### Technical Documents

NoTrax® Floor Matting



**One Pork Avenue • Tipton, PA 16684-0304**

1-855-493-4647 • Fax: 1-800-621-7447 • [newpig.com](http://newpig.com) • [hothogs@newpig.com](mailto:hothogs@newpig.com)